



Conquer Electronics Co., Ltd.

248018 新北市五股區五權五路 26 號

No. 26, Wucyuan 5th Road, Wugu District,
New Taipei City, 248018, Taiwan

T +886-2-8990-2189

F +886-2-8990-2577

E cqservice@conquer.com.tw

Peitou Factory

112019 台北市北投區立德路 120 巷 15 號

No. 15, Lane 120, Lite Road, Peitou, 112019,
Taipei, Taiwan

T +886-2-2895-8895

F +886-2-2895-8880

Conquer Electronics (Shen Zhen) Co., Ltd

518109 廣東省深圳市龍華區龍華街道建設東路北側
(金蘋果)九單元 403 室

(Room No. 403, Unit Nine Jinpingguo),
North of Jianshe East Road, Longhua Street,
Longhua District, Shenzhen,
Guangdong Province, China

T +86-755-2373-9211

F +86-755-2373-9213

Suzhou Office

215000 江蘇省蘇州市相城區紀元路 669 號
(檀香花園) 12 幢 601 室

Room 601, Building 12, (Sandalwood Garden),
No. 669 Jiyuan Road, Xiangcheng District,
Suzhou, Jiangsu Province, China

T +86-512-6586-7087

F +86-512-6586-7539



**Product
Brochure**



We are a leading fuse expert in the Asia-Pacific market and can resolve any fuse issues our clients encounter. For over forty years, we've worked closely with clients helping our clients grow their businesses, and realizing growth across the industry.

Go Further, Go Conquer.

Conquer is driving our business further to become the number one fuse manufacturing company in Asia. We're absolutely committed to ensuring Conquer's products and technology keep pace with the rapidly changing technology industry. By persistently striving for excellence within our own company, we deliver outstanding products and services to ensure our clients deliver nothing short of excellent product safety—and help drive their businesses forward.






High Current Ratings
for Powerful **Electric
Vehicle** Circuit



Smaller, More Powerful
Fuses for Smaller, More
Powerful **Consumer
Electronics**



Freeing Up Space on
Circuit Boards for
Lighting Applications

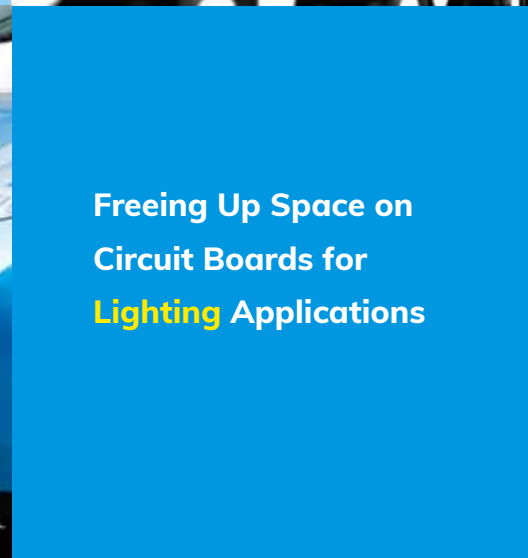


A High Degree of
Explosion Protection
for Consistent Safety
in **Home Appliances**



Lightning Simulation
Test: Perfect for Outdoor
Telecom Station



Fuses Custom-
developed for **Power
Tools** with Long-lasting
Batteries

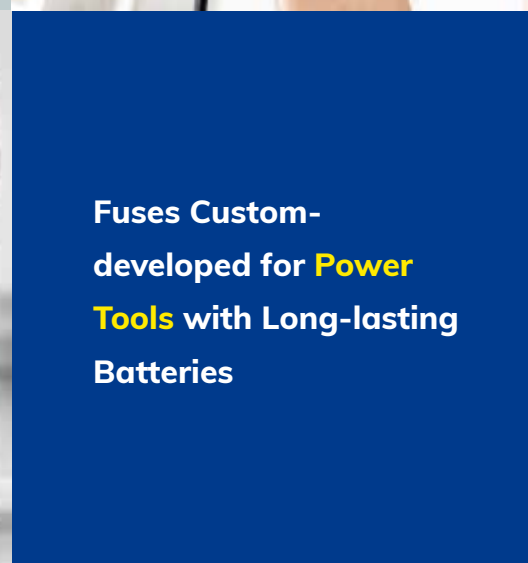

An Expert in the Asia-Pacific Fuse Market

Established in 1977, Conquer has remained steadfast in its commitment to safeguard all types of electronic products—we are now the leading fuse designer and manufacturer in the Asia-Pacific region.

No. 1 fuse company in Taiwan

No. 1 global supplier of subminiature fuses

No. 1 supplier for the global notebook industry

No. 3 supplier in the LCD segment

45⁺
Years

**In Fuse
Manufacturing**

340⁺

**Client-Focused
Employees**

1.8
Billion

**Annual
Capacity**

Partnered with Global Industry Leaders

We keep pace with the rapidly changing demands of modern industry, ensuring global leaders across the electronics industry achieve nothing less than exceptional product safety.

SONY

Panasonic

PHILIPS

SHARP

SAMSUNG

DELTA

FOXCONN

LITEON




Surface Mount Fuse - LTCC Chip Fuse

The patented hollow cavity design offers superb heat resistance and an extremely high interrupting rating, allowing it to withstand a high degree of inrush current.



Product Model	Size (mm)	F / T *	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
 CQ06LF	1.6 × 0.8 (0603)	F	Ceramic	1-8A	32V	60A @ 32Vdc 35A @ 63Vdc	• LCD Displays • Notebook Computers • Battery Packs • Game Consoles	• Excellent Electric Arc Quenching Ability • Lead-Free & Halogen-Free • Explosion-Proof	
 CQ06LT	1.6 × 0.8 (0603)	T	Ceramic	1-8A	32V	80A @ 32Vdc 35A @ 63Vdc	• Small Motor Systems • Portable Electronics Devices • Input Power Ports • Test Equipment	• Excellent Electric Arc Quenching Ability • Lead-Free & Halogen-Free • Explosion-Proof • Time Delay	
 CQ12LV	3.1 × 1.6 (1206)	F	Ceramic	1-20A	24 / 63V	1A-8A: 50A @ 125Vdc 100A @ 63Vdc 10A-20A: 150A @ 24Vdc	• LCD Displays • Notebook Computers • Battery Packs • Game Consoles	• Excellent Electric Arc Quenching Ability • Lead-Free & Halogen-Free • Explosion-Proof	
 CQ12LH	3.1 × 1.6 (1206)	T	Ceramic	1-20A	24 / 63V	1A-8A: 50A @ 125Vdc 100A @ 63Vdc 10A-20A: 150A @ 24Vdc	• Small Motor Systems • Portable Electronics Devices • Input Power Ports • Test Equipment	• 2014 Taiwan Excellence Award • Excellent Electric Arc Quenching Ability • Lead-Free & Halogen-Free • Explosion-Proof • Time Delay	
 CQ12LI	3.1 × 1.6 (1206)	F	Ceramic	10-30A	48 / 63V	10A-25A: 100A @ 63Vdc 250A @ 24Vdc 10A-30A: 200A @ 36Vdc 150A @ 48Vdc 30A: 300A @ 24Vdc	• Voltage Regulator Module (VRM) Equipments • DC-DC Converters • Battery Packs	• High Current Rating • Ultra High I²t Value • Excellent Electric Arc Quenching Ability • Lead-Free & Halogen-Free	

* Surface Mount Fuse is a small (1206 / 0603 size) device designed for secondary protection of circuits used in space constrained applications.
* F: Fast-Acting / T: Time-Lag

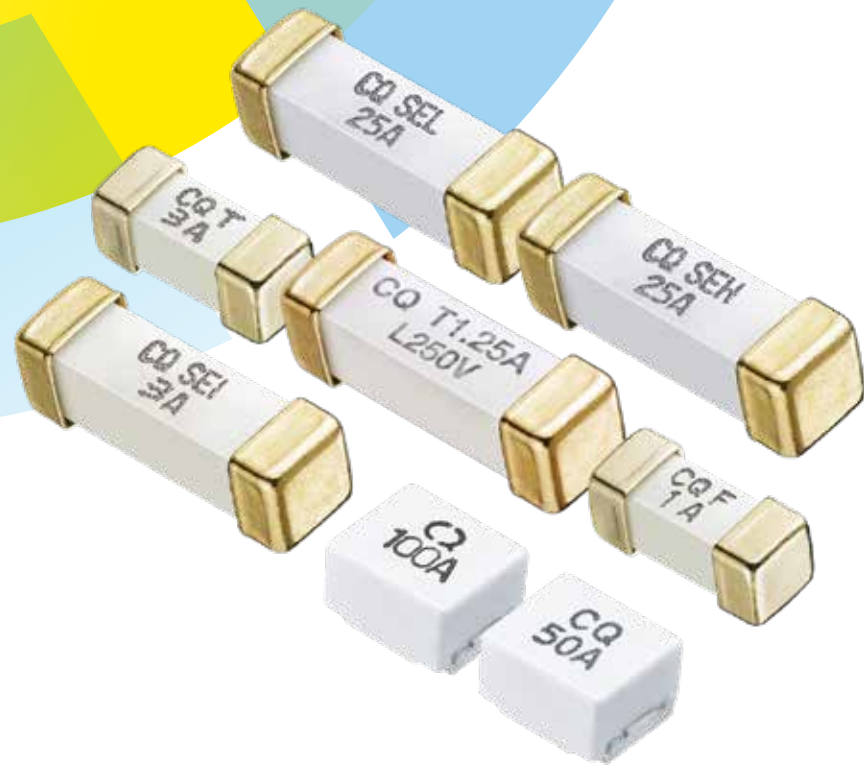


Surface Mount Fuse - SMD

The design of wire-in-air structure makes fuses durable and reliable.



Product Model	Size (mm)	F / T *	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
 SEF(G)	6.1 × 2.6 × 2.6 (2410)	F	Ceramic	0.062-40A	65 / 80 / 125V	62mA-10A: 50A @ 125Vac/Vdc 300A @ 32Vdc 12A-15A: 50A @ 65Vac/Vdc 200A @ 86Vac/Vdc 300A @ 24Vdc 20A-25A: 50A @ 65Vac/Vdc 300A @ 24Vdc 30A-35A: 60A @ 80Vac/Vdc 40A: 80A @ 65Vac/Vdc	• Notebook PC • Wireless Base Stations • Networking • Telecommunication Systems	• Surface Mount Device (SMD) • RoHS Compliant	
 SET(G)	6.1 × 2.6 × 2.6 (2410)	T	Ceramic	0.2-7A	125V	50A @ 125Vac / Vdc 300A @ 32Vdc	• Notebook PC • Wireless Base Stations • Networking • Telecommunication Systems	• Surface Mount Device (SMD) • RoHS Compliant	
 SEH(G)	10.1 × 3.1 × 3.1 (4012)	-	Ceramic	20-30A	125V	20A: 100A @ 125Vac 300A @ 100Vdc 25A-30A: 100A @ 125Vac 100A @ 100Vdc	• Storage System Power • Cooling Fan Systems • Battery Management Systems Server Power	• Surface Mount Device (SMD) • High Current Rating • RoHS Compliant	
 SEI(G)	10.1 × 3.1 × 3.1 (4012)	-	Ceramic	0.5-5A	250V	50A @ 250Vac	• Telecom Equipment System Power • Lighting Systems	• Surface Mount Device (SMD) • RoHS Compliant	
 SEJ	10.1 × 3.1 × 3.1 (4012)	T	Ceramic	1.25A	250V	250A @ 250Vac 200A @ 280Vac 200A @ 63Vac 100A @ 250Vdc 100A @ 125Vdc 200A @ 63Vdc	• Chargers • Medical Equipment • Primary SMD Protection for PCBs	• Surface Mount Device (SMD) • RoHS Compliant	
 SEL	10.1 × 3.1 × 3.1 (4012)	-	Ceramic	10-60A	250V	10A-20A: 50A @ 250Vdc 100A @ 250Vac 150A @ 125Vac 130A @ 80Vdc 300A @ 72Vdc 40A-60A: 100A @ 250Vac 150A @ 125Vac 300A @ 65Vac 100A @ 100Vdc 200A @ 75Vdc 600A @ 60Vdc	• Industrial Equipment • Medical Equipment • Portable EV Chargers	• Surface Mount Device • High Current Rating • RoHS Compliant	
 SEM	10.1 × 3.1 × 3.1 (4012)	-	Ceramic	0.5-2A	600V	60A @ 250Vac 60A @ 600Vac 50A @ 250Vdc 100A @ 125Vdc	• Telecommunication and Networking Equipment	• Surface Mount Device (SMD) • RoHS Compliant • GR-1089-CORE & TIA-968-A Compliance	
 MMS-P	7.3 × 5.8 × 4.0 (2923)	-	Ceramic	20-50A	60V	300A @ 35Vdc 300A @ 60Vdc	• Cooling Fan Systems • Battery Management Systems	• High Current Rating • Saves Space on Printed Circuit Boards • Waterproof	
 28MH	7.3 × 5.8 × 4.0 (2923)	-	Ceramic	20-125A	80V	1500A @ 80Vdc			

* F: Fast-Acting / T: Time-Lag

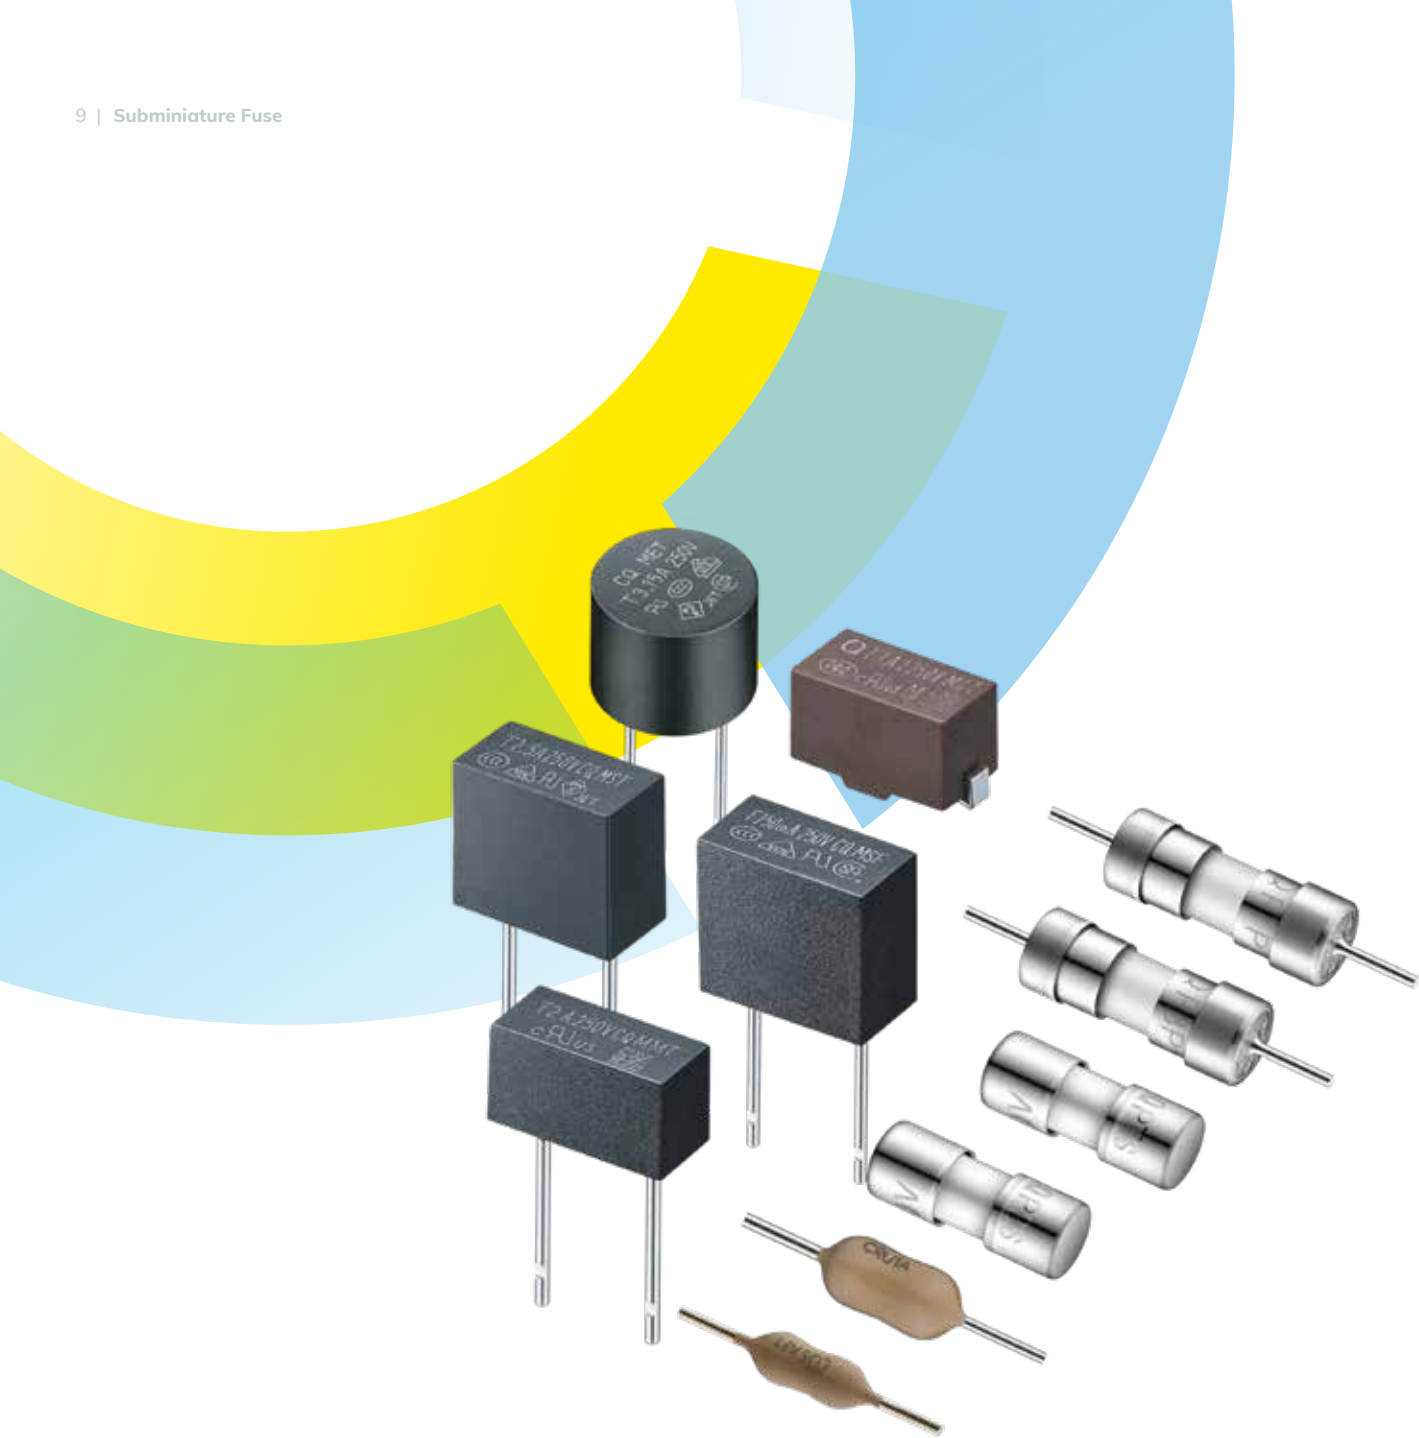

Subminiature Fuse

Conquer’s best-selling fuse made with high frequency soldering technology, increasing fuse stability and reliability.



Product Model	Size (mm)	F / T *	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
 MCT	8.35 × 3.95 × 5.0	T	Plastic	1-6.3A	250V	160A @ 250Vac Optional 100A @ 250Vdc 130A @ 300Vac 100A @ 400Vac	- Power Supplies - Consumer Electronics - Industrial Controllers - LED Lighting Systems - Chargers	- SMD Type - Saves Space on Printed Circuit Boards - RoHS Compliant, Halogen Free	
 PFP	2.7Ø × 7.1	F	Ceramic Tube with Epoxy-Coated	0.125-15A	32 / 125V	125mA-10A: 50A @ 125Vac 300A @ 125Vdc 10.1A-15A: 50A @ 32Vac 300A @ 32Vdc	- Chargers - Power Supplies - Lighting Systems - Office Automation Equipment	- Small Design - Wide Operating Ampere Range	
 PTU	3.6Ø × 10	T	Ceramic	0.25-6.3A	250V	35A or 10In @ 250Vac	- Power Supplies - Chargers - Lighting Systems	Saves Space on Printed Circuit Boards	
 MET	8.35Ø × 7.7	T	Plastic	0.05-10A	250V	35A or 10In @ 250Vac Optional 35A or 10In @ 277Vac	- Power Supplies - Consumer Electronics - Industrial Controllers - LED Lighting Systems - Chargers	- Direct Solderable - Low Internal Resistance - Lead-Free, Halogen-Free, RoHS Compliant	
 MSF	8.35 × 4.3 × 7.7	F	Plastic	0.05-6.3A	250V	35A or 10In @ 250Vac	- Power Supplies - Consumer Electronics - Industrial Controllers - LED Lighting Systems - Chargers	- Low Internal Resistance - Saves Space on Printed Circuit Boards - Lead-Free, Halogen-Free, RoHS Compliant	
 MMT	8.35 × 3.95 × 5.0	T	Plastic	0.05-6.3A	250V	35A or 10In @ 250Vac Optional 160A @ 250Vac 130A @ 300Vac 100A @ 400Vac 100A @ 250Vdc	- Power Supplies - Consumer Electronics - Industrial Controllers - LED Lighting Systems - Chargers	- Low Internal Resistance - Saves Space on Printed Circuit Boards - Wide Operating Voltage Range 2015 Taiwan Excellence Award	
 MST	8.35 × 4.3 × 7.7	T	Plastic	0.05-10A	250V	35A or 10In @ 250Vac Optional 130A @ 250Vac 50A @ 300Vac 100A @ 400Vac 100A @ 500Vac 100A @ 250Vdc	- Power Supplies - Consumer Electronics - Industrial Controllers - LED Lighting Systems - Chargers	- Low Internal Resistance - Saves Space on Printed Circuit Boards - Wide Operating Voltage Range - Internationally Approved	

* F: Fast-Acting / T: Time-Lag



Product Model	Size (mm)	F / T *	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
SMP-A 	4.6Ø × 14.5	F	Glass	1-8A	350V	1A-8A: 100A @ 350Vac 1A-3.5A: 100A @ 140Vdc	• Lighting Systems	• High Voltage Rating	
GBF / GBF-A 	5.2Ø × 20	F	Ceramic	16-20A	250V	200A @ 250Vac	• Power Supplies • Server Power	• Lower I²t Value	
UDL / UDL-A 	5.2Ø × 20	T	Glass	0.5-10A	250V	150A @ 250Vac	• Consumer Electronic • Home Appliances	• Time-Lag Fuses • Lead-Free • RoHS Compliant • Halogen Free	  
UBM-P 	5.2Ø × 20	F	Ceramic	1-10A	250V	1.5kA @ 250Vac	• Power Supplies • Home Appliances • Server Power	• High Breaking Capacity	   
UBM / UBM-A 	5.2Ø × 20	F	Ceramic	0.1-16A	250V	1.5kA @ 250Vac	• Power Supplies • Home Appliances • Server Power	• High Breaking Capacity	       

* F: Fast-Acting / T: Time-Lag



Axial Lead & Cartridge Fuse

Our highly versatile axial lead and cartridge fuses offer cost-efficient and reliable overcurrent protection solutions, suitable for a wide-range of applications across industries.

Product Model	Size (mm)	F / T *	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
 UBF / UBF-A	5.2Ø x 20	F	Ceramic	8-25A	420V	8A-16A: 300A @ 420Vac / Vdc 400A @ 450Vdc 200A @ 500Vac 200A @ 600Vac 20A-25A: 300A @ 420Vdc 400A @ 450Vdc 200A @ 420Vac 200A @ 500Vac	• Telecom Power • Server Power • High Energy and Power Efficient Applications	• Lower I²t Value • High Voltage Rating • Suitable for AC / zDC applications	
 UDA-P	5.2Ø x 20	T	Ceramic	1-10A	250V	1.5kA @ 250Vac	• Power Supplies • TV Power • Home Appliances	• High Breaking Capacity	   
 UDA / UDA-A	5.2Ø x 20	T	Ceramic	0.5-25A	250V	0.5A-12A: 1.5kA @ 250Vac 15A-16A: 500A @ 250Vac 20A: 400A @ 250Vac 25A: 300A @ 250Vac	• Power Supplies • TV Power • Home Appliances	• High Breaking Capacity	         
 UDE / UDE-A	5.2Ø x 20	T	Ceramic	0.5-25A	500V	0.5A-25A: 100A @ 500Vac 0.5A-3.15A: 1.5kA @ 500Vdc 4A-12A: 500A @ 500Vdc 16A-25A: 400A @ 500Vdc	• Power Supplies • High Energy and Power Efficient Applications	• High Voltage Rating • Suitable for AC / DC Applications	
 UXT (British Fuse)	6.3Ø x 25.4	-	Ceramic	3-13A	240V	6kA @ 240Vac	• British Plug	• BS 1362 Standard	 

Product Model	Size (mm)	F / T *	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
 AXT / AXT-A	6.3Ø x 25.4	T	Ceramic	5-50A	60 / 125 / 250V	1A-30A: 3kA @ 60Vac / Vdc 1.5kA @ 125Vac 2kA @ 125Vdc 1.5kA @ 250Vac 35A-50A: 2kA @ 60Vac / Vdc 1.5kA @ 125Vac 2kA @ 125Vdc 1.5kA @ 250Vac	• Base Stations • Telecommunication Datacenters	• High Degree of Inrush Current Withstand Capability • Available in both Cartridge and Axial Lead	
 ABB / ABB-A	6.3Ø x 32	F	Ceramic	1-30A	500V	1A-20A: 200A @ 500Vac/Vdc 20.1A-30A: 100A @ 500Vac/Vdc	• Power Supplies • Server Power	• Wide Operating Ampere Range • Available in both Cartridge and Axial Lead	
 ABE / ABP-A	6.3Ø x 32	F	Ceramic	0.1-40A	250V	0.1A-20A: 10kA @ 125Vac 0.1A-1A: 35A @ 250Vac 1.25A-3.5A: 100A @ 250Vac 3.75A-10A: 200A @ 250Vac 0.1A-10A: 750A @ 250Vdc 10.1A-20A: 750A @ 250Vac / Vdc 20.1A-30A: 100A @ 250Vac 400A @ 125Vdc 1kA @ 125Vac ABE Only 30.1-40A: 1kA @ 250Vac 400A @ 150Vdc	• Power Supplies • Home Appliances	• Wide Operating Ampere Range • Available in both Cartridge and Axial Lead	      
 ABF / ABF-A	6.3Ø x 32	F	Ceramic	10-30A	250 / 450 / 500 / 600V	10-12A: 20kA @ 450Vac 1kA @ 250Vdc 15-30A: 50kA @ 500Vac 20kA @ 500Vdc 15-25A: 10kA @ 600Vdc	• Uninterruptible Power Supplies (UPS) • Three-Phase Power Supplies • Server Power	• Lower I²t Value • High Voltage Rating • Available in both Cartridge and Axial Lead	
 ADA / APA-A	6.3Ø x 32	T	Ceramic	0.1-30A	250V	0.1-30A: 10kA @ 125Vac 0.1-1A: 35A @ 250Vac 1.25-3.5A: 100A @ 250Vac 3.75-10A: 200A @ 250Vac 10.1-15A: 750A @ 250Vac 20.1-30A: 1.5kA @ 250Vac 20.1-30A: 10kA @ 125Vdc ADA Only 15.1-20A: 1500A @ 250Vac APA-A Only 15.1-20A: 400A @ 250Vac	• Power Supplies • Home Appliances	• Wide Operating Ampere Range • Available in both Cartridge and Axial Lead	      

* F: Fast-Acting / T: Time-Lag

Power Fuse

Conquer’s power fuses, with voltage ratings up to 800V, offer optimal protection against overload and short-circuit events in high power AC/DC circuits.



Product Model	Size (mm)	Material	Rated Current (A)	Rated Voltage (V)	Interrupting Rating	Applications	Features	Safety Certifications
 K6F / K6F-R	10Ø × 38	Ceramic	6-30A	600V	TUV / CQC 10kA @ 600Vdc UL248-14 & UL248-19 50kA @ 600Vdc UL248-14 150kA @ 600Vac	• Combiner Boxes and Inverters • Power Supplies • Desktop Meters • Solar Power System • UPS	• High Voltage Rating • High Interrupting Rating	
 KSF / KSF-R	10Ø × 38	Ceramic	15-30A	800V	20kA @ 1000Vdc	• Inverters • Combiner boxes • Battery charge controllers • In-line fuse	• 2022 Taiwan Excellence Award • Meets UL 248-19 photovoltaic fuse standard • High Interrupting Rating	
 K5F	35.0Ø × 78.0 50.0Ø × 83.0	Ceramic	225-400A 450-700A	500V	150kA @ 500Vac 50kA @ 500Vdc	• EV Charging Stations • EV Car Appliances: OBC, PDU, CDU • Power Converters, Power Supply • UPS	• 2022 Taiwan Excellence Award • Provides safety protection in high-voltage environments • High Breaking capacity	
 K8F / K8F-A	24.1Ø × 91.6 35.2Ø × 95.0	Ceramic	50-150A 160-400A	800V	100kA @ 800Vac 50kA @ 800Vdc	• EV Charging Stations • EV Car Appliances • Power Converters • Power Supply • UPS	• 2022 Taiwan Excellence Award • High DC Voltage Rating • High Interrupting Rating	
 EVS	10Ø × 38	Ceramic	10-50A	500V	10kA @ 275Vac 10kA @ 450Vdc 20kA @ 500Vdc	• EV Power Systems	• 2022 Taiwan Excellence Award • RoHS Compliant • PCB and Bolt Down Installation • ISO 8820	
 AUC	10.4Ø × 38.5	Ceramic	30-70A	250 / 500V	2kA @ 500Vac 2kA @ 250Vac 1kA @ 125Vdc	• Ice Machine Compressor • Air Conditioner Inverter • Dehumidifier Compressor • Three-Phase AC for Charging Pile	• High Voltage Rating	
 ALC	14.6Ø × 38.5	Ceramic	63-90A	250 / 500 / 600V	25-63A: 1.5kA @ 600Vac 2kA @ 250Vac 500A @ 125Vdc 90A: 1.5kA @ 500Vac	• Ice Machine Compressor • Air Conditioner Inverter • Dehumidifier Compressor • Three-Phase AC for Charging Pile	• High Voltage Rating	
 AMC	14.6Ø × 22.3	Ceramic	40-100A	170V	100kA @ 170Vdc	• Protection of Telecommunication Equipment	• High Breaking Capacity • High Current Rating	
 BMC	17.4Ø × 42	Ceramic	50-180A	240V	160kA @ 240Vac 50kA @ 150Vdc	• Protecting Semiconductor Equipment	• AC / DC Rated • High Current Rating	

Accessories

Product Image							
Product Model	CQ-203SF (C) (PF)	CQ-203SP (C) (PF)	CQ-203S (C) (PF)	CQ-05CT (PF)	CQ-205S (C) (PF)	CQ-216 (PF)	CQ-111 (PF)
Type / Size	Dia.5.2	Dia.5.2	Dia.5.2	Dia.5.2	Dia.6.3	Dia.10.3	Blade Type (ATQ)
Material	Brass	Brass	Brass	Phosphor Bronze	Brass	Brass	Brass
Suitable Rated Current (A)	10A	10A	15A	10A	25A	30A	15A

Product Image							
Product Model	CQ-112 (PF)	CQ-121 (PF)	CQ122 (PF)	CQ-200CT (PF)	CQ-201NI (PF)	CV-4 (UL) (A) (PF)	CQ-206D (PF)
Type / Size	Mini Blade Type (AST)	Blade Type (ATQ)	Mini Blade Type (AST)	Dia.5.2	Dia.6.3	Dia.5.2	Dia.5.2
Material	Brass	UL Approved Material-Nylon66	UL Approved Material-Nylon66	UL Approved Material-Nylon66	UL Approved Material-Nylon With Fiber Glass	UL Approved Material-PVC	Body: Phenolic resins Cap: Polybutylene terephthalate
Suitable Rated Current (A)	20A	15A	20A	6.3A	30A	-	10A

Product Cross Reference Chart

Product Line	Product Model	Bussmann	Littlefuse	Bel Fuse	Schurter	AEM	Daito	Matsuo
Surface Mount Fuse - LTCC Chip Fuse	CQ06LF	-	438	-	-	F0603FF	-	-
	CQ06LT	CC06H, 0603FA	-	-	USF 0603	F0603SB	-	-
	CQ12LV	CC12H, 3216FF	437	-	-	F1206FA	-	-
	CQ12LH	CC12H, 3216FF	469	C1S	USF 1206	F1206SB	-	-
	CQ12LI	CC12H	501	-	UST 1206	F1206HB, F1206HC	-	-
Surface Mount Fuse - SMD	SEF(G)	CB61F	451, 453	SSQ	-	-	-	-
	SET(G)	6125TD	452, 454	SST	-	-	-	-
	SEH(G)	-	456	-	-	-	-	-
	SEI(G)	1025TD	443	UMTS	-	-	-	-
	SEJ	-	-	-	UMT 250	GF4012	-	-
	SEL	-	-	0678L	-	-	-	-
	SEM	TCP	461	SMP	-	-	-	-
	MMS-P	-	-	-	-	-	-	JHC
	28MH	-	-	-	-	-	-	JHC
Subminiature Fuse	PFP	MCR	251, 253	-	172322	-	-	-
	PMU	MCRS	777	MS	-	-	-	-
	PTU	-	677	-	SPT 3.6x10	-	-	-
	MET	SR-5H	0663(LT5)	MRT	MST 250	-	-	-
	MST	SS-5	392, 400	RST	-	-	-	-
Axial Lead & Cartridge Fuse	SMP-A	-	-	3JQ	-	-	-	-
	UDL-A	S508-V	219XA	5ETP	-	-	-	-
	UBM-P	-	216SP	-	-	-	-	-
	UBM	S501	216	5HF	SP 5 x 20	-	-	-
	UBM-A	S501-V	216XE	5HFP	SP 5 x 20 Pigtail	-	-	-
	UBF	-	487	-	-	-	-	-
	UBF-A	-	487XE	-	-	-	-	-
	UDA-P	S505-SC	215SP	-	-	-	-	-
	UDA-A	S505-V	215XE	5HTP	SPT 5 x 20 Pigtail	-	ES5R	-
	UDE	-	477	-	-	-	-	-
	UDE-A	-	477XE	-	-	-	-	-
	UXT	TDC180	-	-	-	-	-	-
	AXT	TCP70	688	-	-	-	-	-
	ABE	ABC	314	3AB	-	-	HA2	-
	ABP-A	ABC-V	324	3ABP	-	-	HA1, HC	-
	ADA	MDA	326	GSA	SUT 6.3 x 32	-	-	-
	APA-A	MDA-V	325	GSAP	SUT 6.3 x 32 Pigtail	-	-	-
	ABF/ABF-A	GBH/GBH-V	505/506	-	-	-	-	-
Power Fuse	K6F/K6F-R	PVM	KLKD	-	-	-	-	-
	K8F/K8F-A	FWP	L75QS	-	-	-	-	-
	EVS	EV-10	HEV	-	-	-	-	-
	AUC	-	-	-	-	-	GAC	-
	ALC	-	-	-	-	-	LAC	-
	AMC	TPS	TLS	-	-	-	-	-
	BMC	LET	-	-	-	-	-	-